



Wallace Run – Pump Station


Beaver County, PA

OWNER

Big Beaver Borough, PA

PROJECT DESCRIPTION

Faced with a failing pump station and a tight federal funding deadline, Big Beaver Borough, PA, needed a fast, reliable solution after previous replacement efforts stalled. A complete EveraFLO™ pump station package was delivered—streamlining permitting, approvals, and installation. The result: on-time, cost-effective implementation that overcame delays common to traditional construction methods.

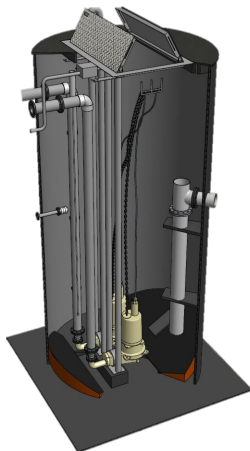

INSTALLATION DATE:

October 2024

SCOPE OF SUPPLY

- EveraFLO 93” Dia. Municipal Pump Station
- Aluminum Access Hatch Cover
- Duplex Pump Assembly
- External Valve Vault Assembly
- Electrical Panel Stand
- Remote Control & Monitoring
- Emergency Generator w/ ATS
- Installation & Commissioning Support

Technical Data

	EveraFLO 93”
Avg Daily Flow	90,000 GPD
Discharge Rate	250 GPM
Pump Type	Duplex submersible (Grinder)
Wetwell Depth	25’